GENERAL NOTES

1. WORK MUST COMPLY WITH ALL TOWN OF ADDISON BUILDING CODES AND AMENDMENTS (E.G. 2018 EDITION OF THE IBC, 2018 EDITION OF IECC & 2017 EDITION OF THE NEC)
2. EXITS AND EXIT ACCESS DOORS SHALL BE MARKED BY AN APPROVED EXIT SIGN READILY VISIBLE FROM ANY DIRECTION OF EGRESS TRAVEL. EXIT SIGN PLACEMENT SHALL BE SUCH THAT NO POINT IN AN EXIT ACCESS CORRIDOR IS MORE THAN 100 FEET FROM NEAREST VISIBLE EXIT SIGN (IBC 1011.1). EXIT SIGNS SHALL BE ILLUMINATED AT ALL TIMES. TO ENSURE CONTINUED ILLUMINATION FOR DURATION OF NOT LESS THAN 90 MINUTES IN CASE OF PRIMARY POWER LOSS. THE SIGN ILLUMINATION MEANS SHALL BE CONNECTED TO AN EMERGENCY POWER SYSTEM PROVIDED FROM STORAGE BATTERIES OR UNIT EQUIPMENT (IBC 1011.5.3).
3. PORTABLE FIRE EXTINGUISHERS SHALL BE PROVIDED IN ACCORDANCE WITH NFPA 10, TYPE 4A:60:B:C THROUGHOUT FACILITY WITH NO GREATER THAN 75 FEET OF TRAVEL TO REACH AN EXTINGUISHER AND/OR AT THE DISCRETION OF THE LOCAL FIRE MARSHAL.
4. DOORS AT EXIT PASSAGEWAYS, EXIT DISCHARGE, AND EXIT STAIRWAYS SHALL BE IDENTIFIED BY TACTILE SIGNS COMPLYING WITH 2017 ICC/ANSI A117.1 ACCESSIBILITY & ADAGG STANDARDS.
5. ALL PENETRATIONS (E.G. ELECTRICAL, MECHANICAL, ETC.) WILL HAVE TO BE FIRE PROTECTED (E.G. FIRE CAULK, FIRE DAMPERS, FIRE COLLARS, ETC.)
6. INSTALL ALL COMBUSTIBLE PIPING MATERIAL, ELECTRICAL WIRING, DUCTS PERMITTED IN TYPE II CONSTRUCTION IN ACCORDANCE WITH THE INTERNATIONAL MECHANICAL CODE. PLENUMS REQUIRE A 25-FIRE AND A SMOKE DEVELOPED INDEX OF 50 OR LESS.
7. FIRE RESISTANCE OF COMMUNICATION WIRES AND CABLES INSTALLED AS WIRING WITHIN THE BUILDING (E.G. FIRE SMOKE RATINGS IN PLENUMS AND DUCTS NEC SECTION 300.22) SHALL BE LISTED AS BEING SUITABLE FOR THE PURPOSE. ALL PENETRATIONS THROUGH FIRE-RESISTANCE RATED WALLS, PARTITIONS, FLOORS OR CEILINGS SHALL BE SLEEVED WITH METAL CONDUIT AND FIRE-STOPPED AT EACH END USING LISTED APPROVED METHODS.
8. EGRESS DOORS SHALL BE READILY OPENABLE FROM THE EGRESS SIDE WITHOUT USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT.
9. ELECTRICAL, PLUMBING, MECHANICAL, DUCT AND SIMILAR THROUGH PENETRATIONS IN THE TOP AND BOTTOM WALL PLATES, FLOORS, AND HORIZONTAL ASSEMBLIES ARE REQUIRED TO BE SEALED AROUND THE ANNULAR SPACE OF THE PENETRATION(S).
10. CONSTRUCTION WORK HOURS: NOISE SOURCES ASSOCIATED WITH OR CREATED BY CONSTRUCTION, REPAIR, MAINTENANCE, REMODELING, DEMOLITION, OR GRADING OF ANY REAL PROPERTY, PROVIDED SUCH ACTIVITIES DO NOT TAKE PLACE BETWEEN THE HOURS OF 10:00 P.M. AND 7:00 A.M. ON ANY DAY, EXCEPT IN THE CASE OF AN URGENT PUBLIC NECESSITY IN THE INTEREST OF PUBLIC SAFETY AND CONVENIENCE AND FOR WHICH AN APPLICATION FOR A PERMIT HAS BEEN ISSUED FOR SUCH USE IN ACCORDANCE WITH DIVISION 2 OF TOWN OF ADDISON CODE OF ORDINANCES ARTICLE III, SECTION 34-61.

EGRESS & BUILDING CALCS

CODE USED IN PREPARING THIS REVIEW:
- 2015 INTERNATIONAL BUILDING CODE
- 2015 INTERNATIONAL MECHANICAL CODE
- 2017 NATIONAL ELECTRICAL CODE
- 2015 INTERNATIONAL PLUMBING CODE
- 2015 INTERNATIONAL FIRE CODE
- 2015 INTERNATIONAL ENERGY CONSERVATION CODE

TEXAS ACCESSIBILITY STANDARDS (TAS)
ANY APPLICABLE CITY AMENDMENTS

USE OR OCCUPANCY CLASSIFICATION
'B' BUSINESS GROUP (SECTION 304.1-IBC) - OFFICE AREA

TYPE OF CONSTRUCTION
- II-B: EXISTING MULTI-TENANT BUILDING; SPRINKLED.

PLUMBING FIXTURE CALCULATIONS (SECTION 2902)

TOTAL OCCUPANCY LOAD = 243 OCCUPANTS

TOTAL WATER CLOSETS REQUIRED = 8 REQ'D
10 WATER CLOSETS PROVIDED

TOTAL LAVATORIES REQUIRED = 6 REQ'D
6 LAVATORIES PROVIDED

DRINKING FOUNTAINS REQUIRED = 2 REQ'D
2 HI/LO DRINKING FOUNTAIN PROVIDED

SERVICE SINK REQUIRED = 1 REQ'D
1 BLDG SERVICE SINK PROVIDED (LOCATED IN JANITOR ROOM)

MEANS OF EGRESS
EGRESS CAPACITY FACTORS (SECTION 1005.3.2 - IBC)
OTHER COMPONENTS (DOORS, CORRIDORS, ETC...):
0.15 INCH/OCC
REQUIRED: 122 OCC x 0.15 INCHES/OCC = 18.3 INCHES (32 INCHES MIN. REQUIRED)
PROVIDED: (1) 3'-0"WIDE DOOR = 36 INCHES TOTAL.

EGRESS CAPACITY - NUMBER OF EXITS (SECTION 1006 - IBC)
2 EXITS REQUIRED
2 EXITS PROVIDED

MAXIMUM COMMON PATH OF EGRESS TRAVEL
SECTION (TABLE 1006.2.1 - IBC)
BUSINESS GROUP (B) = 100 FEET, FULLY SPRINKLERED

MAXIMUM EXIT ACCESS TRAVEL DISTANCE (TABLE 1017.2 - IBC)
BUSINESS GROUP (B) = 300 FEET, FULLY SPRINKLERED

MINIMUM CORRIDOR WIDTH (TABLE 1020.2 & 1020.4 - IBC)
44 INCHES MINIMUM REQUIRED
MAXIMUM DEAD END CORRIDOR LENGTH OF 50 FEET (EXCEPTION #2)

BUILDING AREA CALCS (TABLE 1004.5)


TOTAL GROSS SF (FLOOR 1) = 24,216 SF

BUSINESS AREAS = 24,216 SF / 100 GROSS = 243 OCC

TOTAL OCCUPANCY LOAD = 243 OCC

LEGEND

TOTAL TRAVEL DISTANCE
DIRECTION OF TRAVEL
TRAVEL PATH AND LENGTH
1 TOTAL OCC. EGRESS
EXIT SIGNAGE (REFER TO GENERAL NOTE #2)

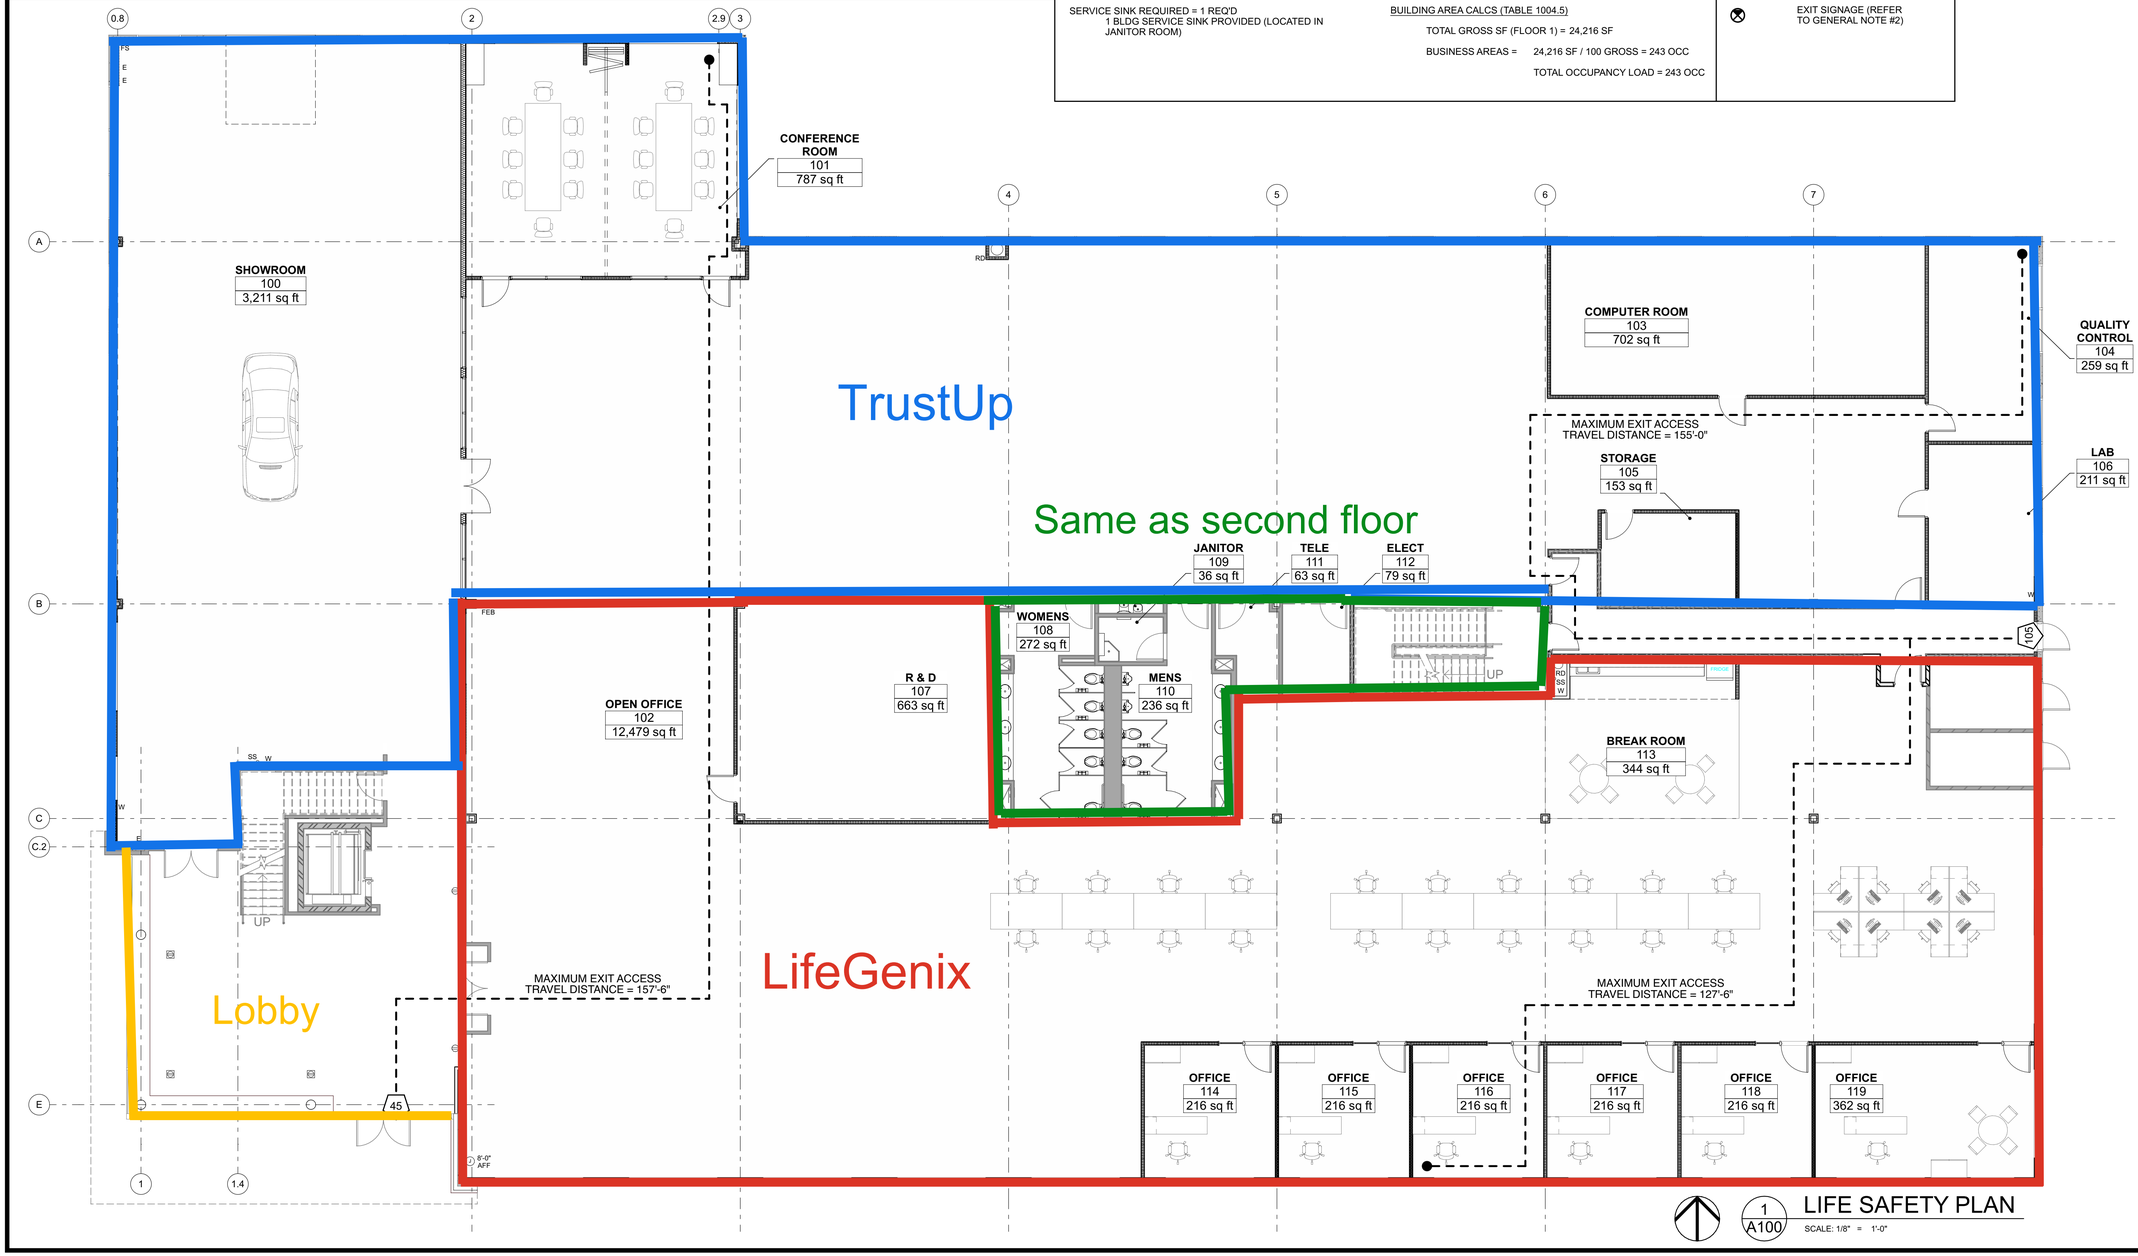

1 A100 LIFE SAFETY PLAN
SCALE: 1/8" = 1'-0"

City of Dallas
APPROVED
Building Inspection
05/27/22

MEL/ARCH
the architectural studio
1201 EVANS AVENUE
SUITE 300
FORT WORTH, TX 76104
PHONE: (817) 653-3007
E-MAIL:
matthijs@melarch.com

CONSULTANTS:

MEP: POINTSWEST DESIGN	(817) 676-2306

I HEREBY CERTIFY THAT THE PORTIONS OF THIS TECHNICAL SUBMISSION BEARING MY SEAL AND SIGNATURE WERE PREPARED BY ME OR UNDER MY SUPERVISION AND CONTROL. I AM A DULY REGISTERED ARCHITECT UNDER THE LAWS OF THE STATE OF TEXAS

SIGNATURE

2-25-2022
DATE ISSUED

20893
REG. NO.

REGISTERED ARCHITECT MATTHIJS MELCHIORS 20893 STATE OF TEXAS

BENT TREE
FIRST FLOOR
OFFICE FINISH-OUT

17230 DALLAS PKWY
DALLAS, TX 75248

PERMIT SET. FOR REGULATORY APPROVAL AND PERMITTING. CONSTRUCTION SET.

NO:	DATE:	BY:
	12-17-2021	CONCEPTUAL PLAN
	01-11-2022	CONCEPTUAL REV
	01-12-2022	CONCEPTUAL REV
	01-13-2022	CONCEPTUAL REV
	01-19-2022	CONCEPTUAL REV
	01-25-2022	CONCEPTUAL REV

PROJECT NO:	PC21013
DRAWN BY:	RA
CHECKED BY:	MM
ISSUED BY:	MM

COPYRIGHT:
MELCHIORS ARCHITECTURE, LLC. 2022

SHEET TITLE:
LIFE SAFETY PLAN

A100